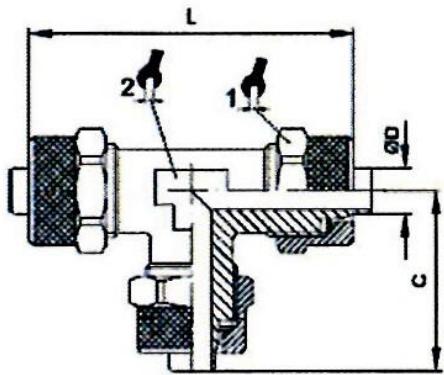


Material:
max. Betriebsdruck:
max. Betriebstemperatur:
verwendbare Schläuche:
Messing vernickelt
18 bar
200 °C
PA, PE, PU

14.800-8-E

T-Verbinder

Typen Nr.	Artikel Nr.	ØD	C	L	1	2	3	O-Ring
14.800-6-E	115419	6/4	22,5	45,0	12	8	12	ohne
14.800-8-E	115420	8/6	22,5	45,0	14	10	14	ohne
14.800-10-E	115417	10/8	25,5	51,0	16	11	16	ohne
14.800-12-E	115418	12/10	30,0	60,0	18	14	18	ohne