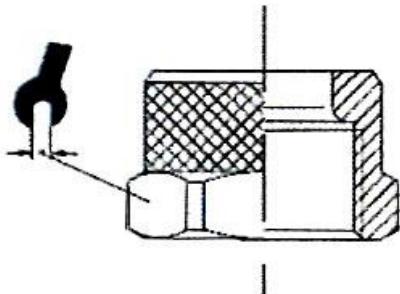


Material:  
max. Betriebsdruck:  
max. Betriebstemperatur:  
verwendbare Schläuche:

Messing vernickelt  
18,0 bar  
200 °C  
PA, PE, PU


**16.012-8-E**

## Überwurfmuttern

Typen Nr.	Artikel Nr.	ØD	A	B		O-Ring
16.007-5-E	115485	5/3	M 7x0,75	8,5	8	ohne
16.010-6-E	115486	6/4	M 10x1	10,5	12	ohne
16.012-8-E	115487	8/6	M 12x1	10,5	14	ohne
16.014-10-E	115488	10/8	M 14x1	11,5	16	ohne
16.016-12-E	115489	12/10	M 16x1	13,0	18	ohne